


Cable Lugs

APPLICATION

Termination of positive, negative, test and reference electrode cables.

BELL ENTRY COPPER TUBE TERMINALS

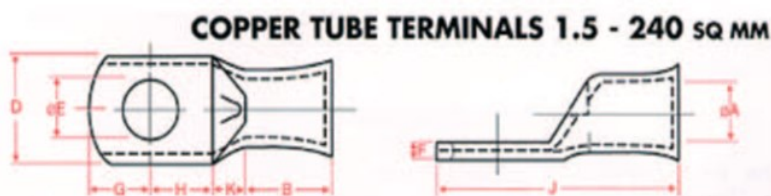

- In accordance with the codes of practice as directed by BS7609 (1992)
- Finish electro tinned to BS1872 (1984)
- Copper Conductivity to 99.9% I.A.C.S
- Copper tube double annealed to BS2871 Part 2 (C101)
- Working temperature up to 180°C (Standard)
- Working temperature, with nickel plating, up to 350°C (Special)
- All Copper Tube Terminals have a radiused entry

Typical sizes detailed below, full range available upon request.

Part No	Cable Size Sq mm	Stud Size mm diameter	ØA (mm)	B (mm)	D (mm)	ØE (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)
DX10-8	10	8	4.5	12	12	8.4	1.03	6	9	27	3
DX10-10	10	10	4.5	12	19	10.5	1.8	10	10	35	3
DX16-8	16	8	5.5	15	11	8.4	1.31	6	9	34	4
DX25-8	25	8	7	15	16	8.4	1.6	10	11	40	4
DX25-10	25	10	7	15	16	10.5	1.6	10	10	39	4
DX35-10	35	10	8.6	18	16.2	10.5	2	9	11	43	5
DX50-10	50	10	9.6	23	17.5	10.5	2.4	10	10	49	6
DX70-12	70	12	11.2	23	21.5	13	3	11	11	52	7