


Carbonaceous Backfill

APPLICATION

Impressed current cathodic protection ground beds and packaged impressed current anodes.

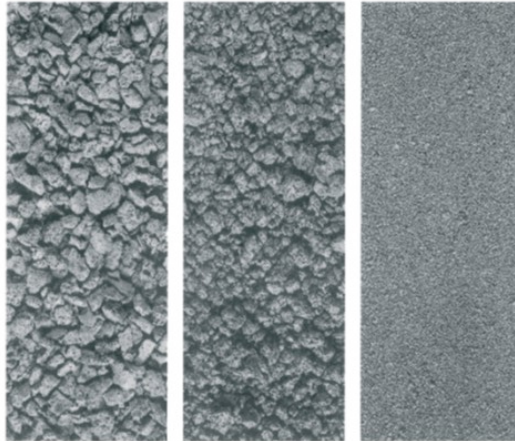

Chemical Composition	Metallurgical Coke Breeze (SP)	Petroleum Coke (DB)*	Fine Grained Petroleum Coke (CS)*
Ash	11.50	0.40	0.40
Volatiles	1.2	0.40	0.30
Moisture	11.50	0.20	0.10
Fixed carbon	87.30	99.00	99.20
Size grading	0 – 10mm	1 – 3mm	0 – 1mm
Bulk density	700 to 850 Kg / m ³	750 to 900 Kg / m ³	850 to 1000 Kg / m ³
Resistivity @ 150psi	<0.5 Ohm.cm	<0.15 Ohm.cm	0.1 Ohm.cm

Products supplied in 25kg multi-walled paper bags, stacked on pallets and shrink wrapped
 Alternatively, 1 tonne bulk bags on pallets and shrink wrapped

* A surfactant can be added to assist in “deep bore hole” applications